

ISOLATED TRANSDUCER OF DC SIGNALS WITH ACTIVE OUTPUT FOR RAILWAY APPLICATIONS

- Measures and separates signals from RTD, TC and RTD sensors
- active output 4-20mA or 0-20mA or 0-10V or inverse conversion
- galvanic isolation 4000Vef input - output - power supply
- AY-USB adapter user configuration
- auxiliary power supply in a wide range of 19 to 300VDC and 90 to 250VAC
- version for mounting into switchboard on DIN 35 rail
- accuracy <0.1%

Converter with software programmable input and active output is used to convert:

- voltage from any thermocouple with linearization and internal cold junction compensation
- resistance (0..320Ω, 0..2.5kΩ)
- RTD signal (Pt100, Ni1000 temperature sensor)
- KTY thermistors up to 2.5kΩ
- potentiometer 0..100Ω, 0..1300Ω a 0..11kΩ, 2w OV 0..10k
- NTC 10kΩ, 0..100kΩ, 0..1V .. (more in the input signal table)

Electrical specifications:

- | | |
|---|---|
| - operating temperature range: | OT (-40 ... + 70 ° C) |
| - storage temperature range: | - 40 ... + 80 ° C |
| - auxiliary power supply: | rated: 24VDC |
| - auxiliary power range: | 16.5 - 300VDC, 90 – 250VAC |
| - power supply without interruption: | Class S1 Art. : 5.2.4 |
| - power consumption: | max 1.5VA |
| - Input PXN30 / R.A: | Thermocouples: J, K, T, B, L, S, F, E, N, R |
| | Pt100, Pt1000, Pt200, Pt500 |
| | Ni100, Ni1000 TKR 5000 or 6180ppm / K |
| | OV and PTC according to input signal table |
| | input 2w only with connection of terminals 1 and 2 |
| - Input PXN30 / R.B: | Potentiometer (0..150Ω, 1300Ω, 11kΩ) a KTY81-210) |
| - Input PXN30 / R.C: | RTD 4w, NTC .. |
| - max. lead resistance: | <10 Ω / 1 wire |
| - current through RTD sensor: | <0.5mA |
| - cold junction temperature compensation for thermocouples: | -30 ..70 ° C, accuracy ± 1 ° C |
| - resolution: | 0.01% |
| - output active signal: | 4..20mA, 0..20mA, 0..10V or inverse conversion |
| - current output loop amplitude: | min. 15V (Rz - 750ohm) at 20mA |
| - load voltage output: | max. 10mA |
| - current and voltage limit: | 2.5..24mA, 0..24mA, 0 ..13.8V |
| - damping: | 0,1..20s (basic setting: OV, Pot <0,2s, RTD, U, I, Tc 0,3s) |
| - accuracy of measurement error: | ± (0.1% + error see table) |
| - temperature error: | max. 0.05% / 10K |
| - EMC error : | <0.3% |
| - enclosure: | IP40 / IP20 enclosure rating |
| - mounting position: | Vertical, Latch down |
| - weight: | 90g |
| - environment: | degree of pollution 2 |
| - air and surface distance input / output / power: | min. 6,5mm |
| - rated impulse voltage Uni: | 6kV |
| - test voltage Ua: | 4kV |
| - connection wire: | 0.5 to 2.5mm2 |
| - optional: | AY-USB programming adapter (Rawet Studio setup program) |



Type tests:

ČSN EN 60688 ed.2	Electrical measuring transducers for converting A.C. and D.C. electrical quantities to analogue or digital signals
ČSN EN 61326-1 ed.3	Electrical equipment for measurement, control and laboratory use - EMC requirements - Part 1: General requirements
ČSN EN 61010-1 ed.2	Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements
ČSN EN 50155 ed.5	Railway applications - Electronic equipment used on rolling stock
ČSN EN 50124-1 ed.2	Railway applications - Insulation coordination - Part 1: Basic requirements - Clearances and creepage distances for all electrical and electronic equipment
ČSN EN 61373 ed.2	Railway applications - Rolling stock equipment - Shock and vibration tests
ČSN EN 45545-2+A1	Railway applications - Fire protection on railway vehicles - meets the set of requirements for monitored products according to Table 2 - PCB complies with a set of requirements R24, R25 - the box meets the set of requirements R26 - meets the requirements of HL1, HL2, HL3

Input Signal Variants:

User-adjustable inputs: (Actual input and measuring range can be set within the specified maximum range)

Typ	Input		range (linearization table)	error
PXN30/R.A	Thermocouple thermometer (Tc), internal compensation	Fe-CuNi J	-210..1200°C	0,3°C od -60°C
			-210..1050°C	0,3°C od -100°C
			-210..300°C	0,3°C od -160°C
		Fe-Ko L	0..899°C	0,05%
			-210..400°C	0,3°C od -150°C
		NiCr-NiAl K	-270..1372°C	0,1% od -99°C
			-60..1372°C	0,3°C od -20°C
			-50..1768°C	0,1% od 40°C
		Pt10Rh-Pt S	0..1820°C	0,1% od 386°C
		Pt30Rh-Pt6Rh B	-270..1000°C	0,1% od -153°C
		NiCr-CuNi E	-270..1300°C	0,1% od -122°C
		NiCrSi-NiSi N	-50..1768°C	0,1% od 54°C
		Pt13Rh-Pt R	-270..400°C	0,1% od -163°C
		Cu-CuNi T	-50..1410°C	0,1%
		Ni-Ni18Mo M	0..2301°C	0,05%
		W5Re-W26Re C	0..2301°C	0,1% od 49°C
		W3Re-W25Re D	0..2301°C	0,1% od 286°C
		W-W26Re G	-30..1400°C	0,05%
		F	-200..400°C	0,1%
		U		
	Resistance thermometer (RTD) 2w or 3w	Pt100	-200..400°C	0,18°C
		Pt100	-30..600°C	0,18°C
		Pt1000	-200..400°C	0,18°C
		Pt1000	-100..500°C	0,18°C
		Ni100, Ni1000 TKR6180 (5000)	-60..180°C	0,18°C
	Linear temp. sensor (KTY)	KTY81..KTY85	-55..150°C	0,25°C
	Resistance Transmitter (OV)	OV/3w	0..320Ω, 0..2,5kΩ	0,03Ω, 0,1Ω
	Potentiometer or OV/2w	potentiometer value affects	0..320Ω, 0..2,5kΩ	0,03Ω, 0,1Ω
	DC voltage (U)	-0,07V..1V	-70mV..140mV, 0..1V	0,01%
PXN30/R.B	Linear sensors	KTY81-210 3w	-55..150°C	0,2°C
		KTY81-210 2w	-50..145°C	0,15°C
		OV 2W	0..11kΩ	2Ω
PXN30/R.C	Potentiometer	does not depend on value in the range	0..1(20)kΩ	0,02%


Mounting:

The transducers are mechanically mounted on a 35 mm DIN rail. After attaching the top edge with a screwdriver, the latch of the fastening mechanism is released and the device is pushed to the bottom with the bottom. After locking, the assembly is finished. Dismantling is carried out in the opposite way.


Connection of terminals:

- 1...3: input RTD 2W, (OV) 2W – connect terminals 1,2
- 1 + 2,3: input RTD(OV) 3W, OV/3
- 1...2...3: input potentiometer (center = 2)
- 2...3(+): input Thermocouple (U)
- 5(-)...6(+): output 4...20mA
- 7,8 auxiliary power supply

Dimensions:

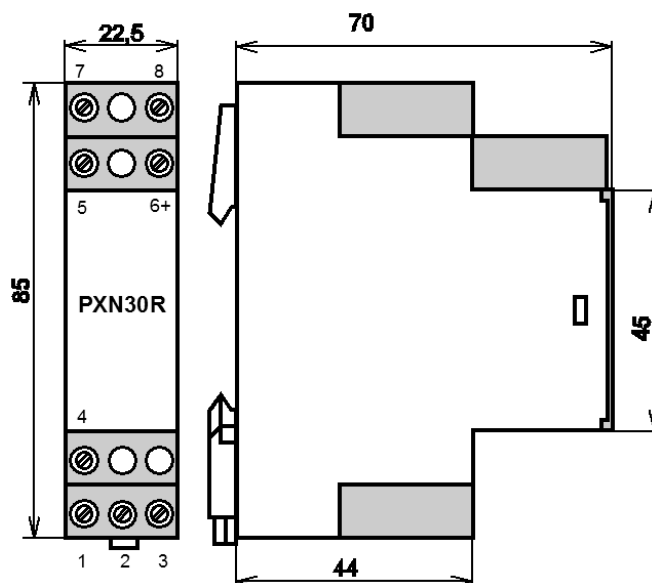

Connection variants:

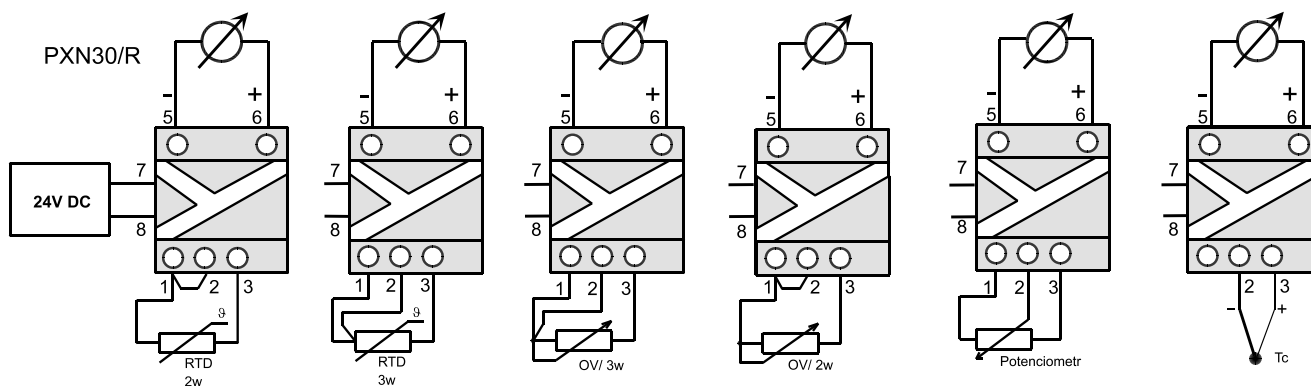

Ordering:

It is necessary to state in the order: see. Examples of ordering.

- converter type and variant
- input parameters (for two-wire connection it is necessary to connect terminals 1 and 2)
- range
- output parameters
- wiring
- damping (if not stated, the basic damping is 0.3s)
- quantity

Examples of ordering :

Typ	variant	input	range	output	connection	damping	quantity
PXN30/R	.A	Pt100	-15...120°C	4-20mA	3w	0,2	2
PXN30/R	.A	Ni1000/6180	0-90°C	0-10V	2w)*	0,5	4
PXN30/R	.A	Tc"K"	-30...330°C	4-20mA		0,3	1
PXN30/R	.A	R	5-105 Ohm	4-20mA	OV/3w	-	5
PXN30/R	.A	Pt1000	0...180°C	0-20mA	2w)*	-	3
PXN30/R	.B	R	0-10k Ohm	0-10V	potentiometer	0,2	6
PXN30/R	.B	KTY81-210	0..145°C	0-20mA		0,3	1

)* connect the terminals 1,2

Notice:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



Likvidaci po ukončení životnosti provést odděleným sběrem.
Rawet s.r.o. je členem sdružení RETELA www.retela.cz

rev.2

Rawet s.r.o.
Čapkova 22
Blansko
678 01

IČO: 47901411
DIČ: CZ47901411
ČSOB Blansko
č. ú. 106093786/0300

tel.: 516 419995, 516 416942
fax: 516 416963
E-mail: rawet@rawet.cz
Internet: www.rawet.cz