


ACCESSORIES FOR THERMOMETERS

Čapková 22
678 01 Blansko, Czech Republic
phone: +420 516 416942, 419995
fax: +420 516 416963

Thermowells:


Designed for mounting into a pipe or a vessel wall
The stem is made of stainless steel grade 17240.
Test pressure: 10.0MPa
Stem length Y per customer request from 20mm to 2500mm.
Outer / inner diameter: 10/8mm or 10/6mm
Connection:
G1/2
M20x1.5
G3/4
M27x2
G1/2 with compression ferrule
M20x1.5 with compression ferrule
Other versions available on request.

Thermowells coated with a two-layer black Teflon resistant up to 270°C are also available.

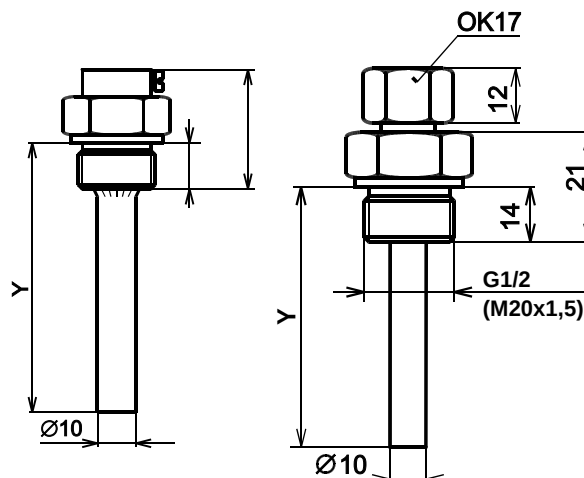

Sliding compression fittings:


Designed for mounting into a vessel wall, gearboxes, motor bearings etc.
Made of stainless steel grade 17240.
Version: free-sliding or tight.
Connection:
M10x1 for dia. 3 and 6, also hermetic for dia. 6
M12x1.75 for dia. 6 and 8
M20x1.5 for dia. 6 and 8, also hermetic for dia. 6 and 8
G1/2 for dia. 6 and 8, also hermetic for dia. 6 and 8
Other versions available on request.




Weld-on bosses:

Designed for welding onto a pipe or a vessel wall
Made of steel 11 353 or stainless steel grade 17240.
Boss length is 50mm, other length per customer request.
Internal thread:
M10x1
G1/2
M20x1.5
M27x2

Straight weld-on boss

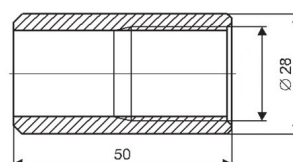


Angled weld-on boss

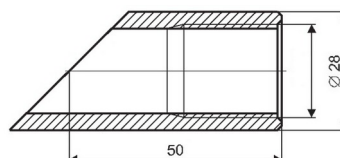

Duct mounting bracket:

Designed for air-handling (HVAC) ducts.
Material: galvanised steel.



At the end of its service life, dispose of the device via separate collection.
Rawet s.r.o. is a member of the RETELA association www.retela.cz